



OFF LINE UPS

LINE INTERACTIVE TECHNOLOGY

High Performance Protection for your Computers, Peripherals & other sensitive Electronic Devices



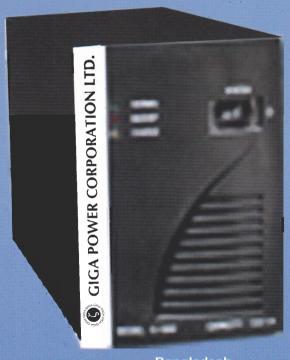



China

GIGA UPS

To ensure your maximum workmanship and to minimize your service cost and hassel, GIGA have designed a reliable back up power system with state own Techonology and through the years of R&D Process.

GIGA Line Interactive Technology base UPS is a unique moduler Type machine, which increases Performance, reliability and downsize any abnormalities of electrical/Electronic equipments.

Features

- Line Interative Off-Line Design
- Input power Correction
- Compact size, lightweight
- Milli Second transfer time
- 0 LED status display
- 0 Status Indication
- 0 Two state battery alarm
- 0 Wide input voltage Range
- 0 Built in AVR
- High efficiency
- Generator Compatibility
- Auto-Shoutdown & Auto-restart (when power re-instit)

Application

- Computer and computerized equipent
- Medical Equipment
- Laboratory Equipment
- Telecommunication equipment
- Satelite & Broadcasting equipm ent
- Other microprocessor base sensitive equipment







Technical Data

SERIES	G (V A)	G (VA)M	G (VA)L	G (VA)XL	G (VA)XXL
BACK-UP-TIME AT FULL LOAD	15 MIN	30 MIN	60 MIN	120 MIN	240 MIN
BACK-UP-TIME AT HALF LOAD	30 MIN	60 MIN	120 MIN	240 MIN	480 MIN
BATTERY TYPE	SMF	SMF	SMF/ INDUSTRIAL	SMF/ INDUSTRIAL	SMF/ INDUSTRIAL
BATTERY WARRANTY	12/24/36 MONTH	12/24/36 MONTH	12/24/36 MONTH	12/24/36 MONTH	12/24/36 MONTH
UPS WARRANTY	ONE YEAR	ONE YEAR	ONE YEAR	ONE YEAR	ONE YEAR

MODEL	G S	500 G		550 G 800		G 1000	G 1200	G 1500	G 2000		
CAPACITY	500	OVA 65		OVA	800VA		1000VA	1200VA	1500VA	2000VA	
TECHNOLOGY						LINE INTERACTIVE					
AC MODE C			NPUT LTAGE		140-270V AC / 160-275V AC						
		OUTPUT VOLTAGE				220V AC ± 3% / ± 5% / ± 8% / ± 10%					
		INPUT FREQUENCY				50 / 60 Hz ± 0.5%					
INVERTER MODE		OUTPUT WAVEFORM			PLUS WAVE MODULATION (PWM)						
		OUTPUT VOLTAGE			220V AC ± 10%						
		OUTPUT FREQUENCY			50 / 60 Hz ± 0.5% (AS INPUT)						
APPLICATION (MAXIMUM)	+ 1 BJ	Or (Monitor) Printer er alent	2 PC+ 1 Or Equivalent		2 PC+ 1 BJ Printer Or Equivalent	3 PC+ 1 BJ Printer Or Equivalent	3 PC+ 1 BJ Printer Or Equivalent	4 PC+ 1 BJ Printer Or Equivalent	
TRANSFER TIME				< 2-4 MS							
BATTERY RECHARGING			8-10 HOURS								
PROTECTION			SPIKE, SURGE, BLACKOUTS, BROWNOUTS, NOISE, OVERLOAD, SHORT CIRCUIT, UNDER & OVER VOLTAGE, BATTERY LOW & BATTERY OVER CHARGE/DEEP DISCHARGE & REVERSE BATTERY POLARITY PROCECTION AS PER SAFETY STANDARD								
NOISE (EMI/RF) FILTER				BUILT-IN							
O PERATING TEMPERATURE			5°C - 55°C								
O PERATING HUMIDITY			10-90% RH								
QUALITY APPROVAL				BSTI APPROVED							

^{***} Product design & specification may be changed without prior notice.



GIGA POWER CORPORATION LIMITED

 $E-mail: info@gigapowerbd.com, www.gigapowerbd.com\\ Email: ctg_sales@gigapowerbd.com, service@gigapowerbd.com\\$

Chittagong Office:

Fahim Villa, Level # 4 & 5, 10/6 Pallabi, Mirpur-12, Dhaka-1216 Faterna Monjii, (Ground Floor), 1446/B/2149 Naya Bazar, Halishahar Tel: +88-02-8001138, 8001139, 01678092810, Fax:+88-02-8001138 Chittagong, Bangladesh. Tel: 01678092818, 01678092820 Authorised Dealer _